

Actinic BL TL/TL-D/T5

Actinic BL TL-DK 36W/10 1SL

With an optimized performance to attract most insects, Actinic BL TL, BL TLD and BL T5 lamps are the ideal choice for electronic insect killer systems. They are also suitable for photopolymerization and reprographic processes. A wide choice of wattages and a special 200degree internal reflector version are available. In addition, Philips provides single-ended compact and T5 Actinic lamp versions as well as a circular Actinic lamp. For extra safety, there is a special shatterproof "Secura" option which ensures that all the lamp's glass and components are retained in a special outer sleeve in the case of accidental breakage. Hence, product designers have a high degree of flexibility in choosing the best fitting solution for their needs including compact designs. What's more, as a 100% lead-free and lowmercury product these lamps also provide a responsible environmental choice.

Product data

• General Characteristics

Cap-Base	G13
Bulb	T26
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures	9000 hr
EM	

• Electrical Characteristics

Lamp Wattage Lamp Wattage Tech- nical	36 W 36 W	
Lamp Voltage	50 V	
Lamp Current	0.865 A	

• Environmental Characteristics

Mercury (Hg)	8.0 mg
Content	

• Light Technical Characteristics

Color Code Color Designation	10 Actinic
(text)	225
Chromaticity Coor-	225 -
dinate X	
Chromaticity Coor-	230 -
dinate Y	
Depreciation 5000	30 %
hours	
Depreciation 2000	20 %
hours	

• UV-related Characteristics

UV-A Radiation	8.8 W
100hr (IEC)	
UV-B/UV-A (IEC)	0.2 %

• Product Dimensions

Base Face to Base Face A Insertion Length B Overall Length C Diameter D

594.5 (min), 596.9 (max) mm 604 (max) mm

28 (max) mm

1

589.8 (max) mm


• Product Data

Order code Full product code Full product name Order product name Pieces per pack Packing configuration Packs per outerbox Bar code on pack -EAN1 Bar code on outerbox - EAN3 Logistic code(s) -12NC Net weight per piece

928019701003 928019701003 Actinic BL TL-DK 36W/10 1SL Actinic BL TL-DK 36W/10 1SL/25 25 25 8727900860832 8727900860849 928019701003 68.900 gr




Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-DK 36W/10	589.8	594.5	596.9	604	28



Photometric data

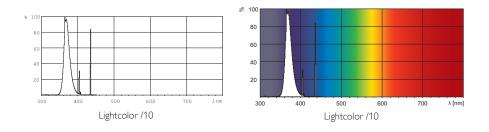



 $\ensuremath{\mathbb{C}}$ 2011 Koninklijke Philips Electronics N.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting