



EN 60598-1	230V / 50Hz	IP 40	IK 07	960°C	CE	RoHS	18W / 36W
------------	-------------	-------	-------	-------	----	------	-----------

Domeniul de utilizare: Iluminatul general de interior

Application: General indoor lighting

Descriere:

Description:

Corp: Armătură din tablă de oțel vopsită cu pulbere

Body: Steel sheet body, painted with powder

Dispersor: Din PMMA opal (O) sau transparent texturat (T)

Diffuser: Opal (O) or transparent patterned (T) PMMA

Montaj: Încăstrat în tavan fals modular

Mounting: Recessed in false modular ceiling

La cerere poate fi echipat cu balast electronic, aparataj pentru reglaj de flux, conector rapid WIELAND sau bloc de conectare "PUSH-IN", kit montaj rapid

On request may be fitted with electronic ballast (dimmable version also), WIELAND connector or block connector "PUSH-IN", fast installation kit

Sursa: Tub fluorescent (T8) și tuburi cu LED



Source: Tubular fluorescent lamp (T8) and tubular LED lamp

Dulie: G13

Socket: G13



Standard: SR EN 60598-1

Standard: SR EN 60598-1




conector
WIELAND/
connector


conector
PUSH-IN/
connector

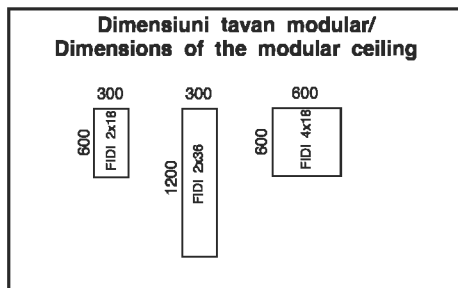

FIDI-03-418 O; T

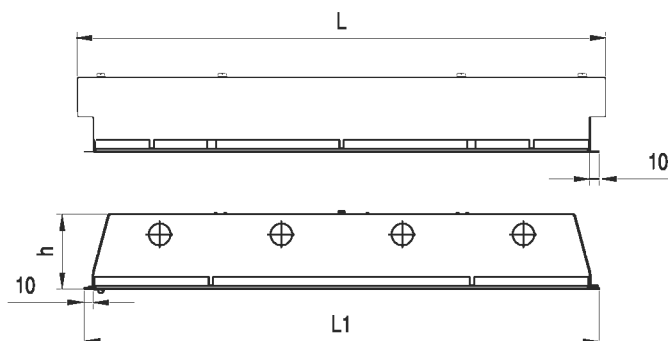

FIDI-03-218 O; 236 O
FIDI-03-218 T; 236 T

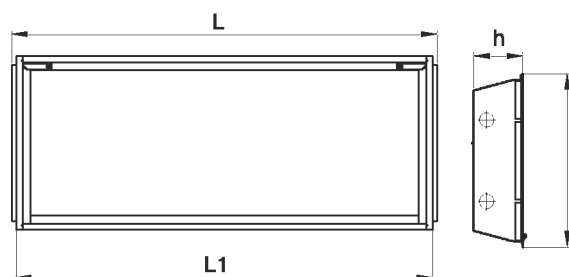

Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]				Masa/ Weight [kg]	Lampa/ Lamp
			L	L1	l	h		
2x18W transparent	21432060	min. 0.92	620	595	297	86.5	3.00	T8 φ 26
2x18W opal	21432061	min. 0.92	620	595	297	86.5	3.00	
2x36W transparent	21442105	min. 0.92	1220	1196	297	86.5	5.50	
2x36W opal	21442106	min. 0.92	1220	1196	297	86.5	5.50	
4x18W transparent	21434083	min. 0.92	620	595	595	86.5	4.70	
4x18W opal	21434084	min. 0.92	620	595	595	86.5	4.70	

*transparent texturat - transparent patterned

*opal - opal

*Codurile pentru produse echipate cu tuburi LED se regăsesc la pg. 252 / The product code for equipping with LED tube to be found on pg. 252