



EN 60598-1 / 2-22	230V / 50Hz	IP 40	IK 02			960°C	CE	RoHS	16W
-------------------	-------------	-------	-------	--	--	-------	----	------	-----

Domeniul de utilizare: Iluminatul de siguranță de tip nepermanent

Descriere:

Carcasă: Din PC

Reflector: Din ABS alb

Dispersor: Din PMMA

Accumulatori: Ni-Cd etanși 4.8V/ 2Ah

Montajul electronic asigură atât încărcarea acumulatorilor în prezența tensiunii de rețea cât și alimentarea de la acumulatori în cazul absenței tensiunii de rețea

Autonomie de funcționare de 80 minute sau 60 minute
Timpul de încărcare a bateriei: 24 ore

Sursa: Lampă fluorescentă (TC-DD)

Dulie: GR10q

Standard: SR EN 60598-1;
SR EN 60598-2-22

Application: Non-continuous emergency lighting

Description:

Body: PC

Reflector: White ABS

Diffuser: PMMA

Accumulators: 4.8V/ 2Ah tight Ni-Cd

The electronic circuit charges the accumulators while the mains power supply is present and also ensures the supply from accumulators if the mains power supply is off

80 or 60 minutes autonomy
Battery charging time: 24 hours



Source: Fluorescent lamp (TC-DD)

Socket: GR10q


Standard: SR EN 60598-1;
SR EN 60598-2-22



DUAL

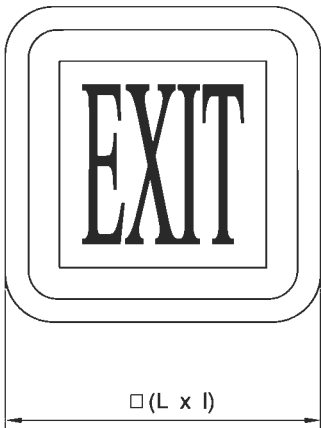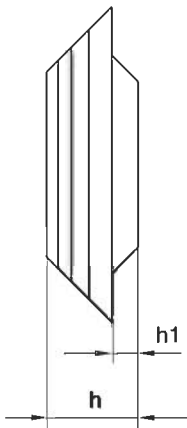

Dimensiuni de montaj/
Mounting dimensions



Tip/Type	Cod produs/ Product code	Autonomie/ Autonomy [h]	Dimensiuni/Dimensions [mm]				Masa/ Weight [kg]	Lampa/ Lamp
			L	I	h	h1		
1x16W	99900583	1.00	325	325	94	27	2.80	TC-DD

