



Halogen FastFit

7018G 800W 230V FastFit

Halogen FastFit lamps are replaced in seconds - thanks to the specially designed base. The compact filament ensures high beam intensity, while the shock-resistant design allows easy handling and reliable use in moving head systems. In addition, the highly innovative P3 technology allows use at higher temperatures, which further extends lifetime and consistency of light output. P3 technology also allows the lamp to be used in any burning position and enables more compact designs of fixtures. And because the FastFit design is also applied to Philips MSR/MSD Gold™ lamps, switching lamp technologies is also quick and easy.

Product data

• General Characteristics

Philips Code	7018G
ANSI Code	GRT
System Description	P3 Technology
Cap-Base	PGJX50
Bulb Finish	Clear
Filament Shape	Bi-Plane
Operating Position	any
Main Application	Entertainment
Life to 50% failures	150 hr

• Light Technical Characteristics

Color Temperature	3200 K
Technical	
Luminous Flux Lamp	20000 Lm

• Electrical Characteristics

Lamp Wattage	800 W
Voltage	230 V
Dimmable	Yes
Rapid Acting HBC	6.3 V
Fuse	

• Luminaire Design Requirements

Pinch Temperature	500 (max) C
-------------------	-------------

• Product Dimensions


Overall Length C	140 (max) mm
Diameter D	19 (max) mm
Overall Width E	41 (max) mm
Light Center Length L	79 mm
Filament Dimensions (WxH) [mm]	9x12.5
Filament Height H	12.5 mm
Filament Length W	9 mm

• Product Data

Order code	924582344228
Full product code	924582344228
Full product name	7018G 800W 230V FastFit
Order product name	7018G 800W 230V FastFit
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8727900807370
Bar code on outerbox - EAN3	8727900807387
Logistic code(s) - 12NC	924582344228
Net weight per piece	0.130 kg


Dimensional drawing

Dimensional drawing

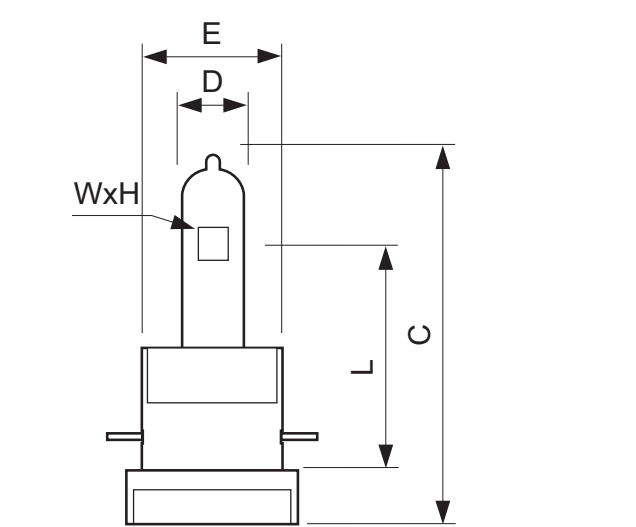

7018G 800W 230V FastFit

Product	C (Max)	D (Max)	E (Max)	H (Norm)	L (Norm)	W (Norm)
7018G 800W 230V FastFit	140	19	41	12.5	79	9



PGJX50

