



HPL

7008 750W/Heat Sink 230V 1CT

HPL lamps include a barrel-shaped filament that is approved by ETC for use in its Source Four™ fixtures. Bright, high quality light and high beam intensity is assured by the optimal filament design, while the unique P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which extends lifetime and consistency of high-quality light output, resulting in fewer early failures and fewer maintenance man hour costs.

Product data

• General Characteristics

Philips Code	7008
System Description	P3 Technology
Cap-Base	Heat Sink
Cap-Base Information	Heat Sink
Bulb Finish	Clear
Filament Shape	Bi-Plane
Burning Position	any
Main Application	Entertainment
Life to 50% failures	300 hr

• Light Technical Characteristics

Colour Rendering Index	100 Ra8
Colour Temperature	3200 K
Technical	
Lamp Luminous Flux	19750 Lm

• Electrical Characteristics

Rated Lamp Wattage	750 W
Voltage	230 V
Dimmable	yes

• Luminaire Design Requirements

Pinch Temperature	500 (max) C
-------------------	-------------


• Product Dimensions

Overall Length C	104 (max) mm
Diameter D	19 (max) mm
Light Center Length L	60.3 mm
Filament Dimensions (WxH) [mm]	8.6x11.5x7.5
Filament Height H	11.5 mm
Filament Length W	8.6 mm
Filament Depth D1	7.5 mm

• Product Data

Order code	496584 25
Full product code	871150049658425
Full product name	7008 750W/Heat Sink 230V 1CT
Order product name	7008 750W/Heat Sink 230V 1CT/10
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8711500496584
Bar code on outerbox - EAN3	8711500496850
Logistic code(s) - 12NC	924555144228
Net weight per piece	0.051 kg

Dimensional drawing

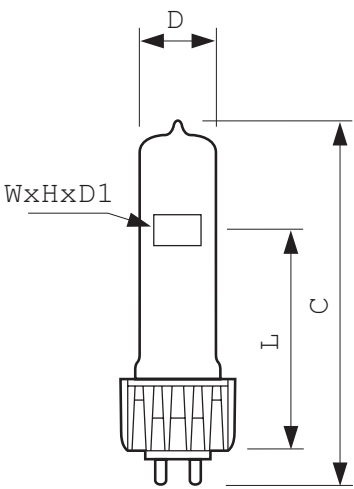

HPL

Product	C (Max)	D (Max)	D1 (Norm)	H (Norm)	L (Norm)	W (Norm)
7008 750W Heat Sink 230V	104	19	7.5	11.5	60.3	8.6

