

PAR56 and PAR64

PAR56 300W 240V MFL



These self-contained spotlights are ideal for intensifying the visual experience in all kinds of clubs, that is because their accurate beam control picks out even the smallest of details even over long distances. This beam control makes the PAR 56 and PAR 64 excellent for long-range light projections. In addition, the universal burning feature provides complete flexibility of luminaires angle and position, while the front glass of the PAR56 provides thermal and physical protection. The result? Complete creative freedom to achieve the desired effect. Immediate re-strike also ensures instant resumption of entertainment after any power interruption.

Product data

• General Characteristics

ANSI Code	-
LIF Code	-
Cap-Base	GX16d
Cap-Base Information	-
Bulb	-
Operating Position	any
Main Application	Flood and Ambient Lighting
Average Lifetime	2000 hr
Life to 50% failures	2000 (min) hr

• Light Technical Characteristics

Beam Description	Medium Flood
Beam Angle	20 D
Beam Angle Technical	20 D
Luminous Intensity	30000 (max) cd
Color Temperature	3000 K

• Electrical Characteristics

Lamp Wattage	300 W
Voltage	240 V

• Environmental Characteristics

Energy Efficiency Label (EEL)	-
-------------------------------	---

• Product Dimensions

Overall Length C	127 (max) mm
Diameter D	178 (max) mm


• Product Data

Order code	924783645504
Full product code	924783645504
Full product name	PAR56 300W 240V MFL
Order product name	Par56 MFL 300W 240V GX16d. 1CT/6
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6
Bar code on pack - EAN1	8711500441942
Bar code on outerbox - EAN3	8711500441959
Logistic code(s) - 12NC	924783645504
Net weight per piece	542.000 kg

Dimensional drawing

PHILIPS

Dimensional drawing

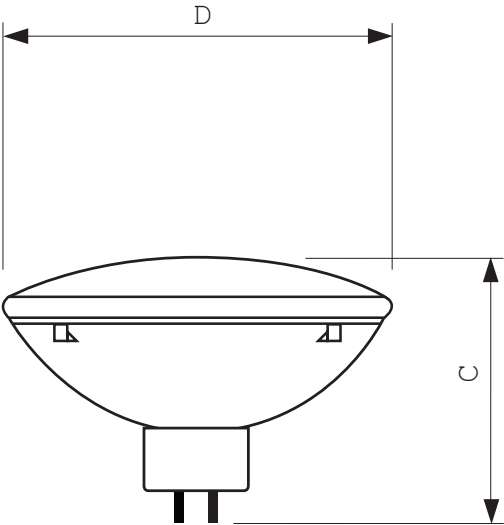

PAR56 300W 240V MFL

Product	C (Max)	D (Max)
PAR56 300W 240V MFL	127	178



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 16
data subject to change