



PAR56

PAR56 300W GX16d 230V WFL 1CT

Extremely powerful pressed-glass 179 mm diameter reflector lamps

Product data

• General Characteristics

Cap-Base	GX16d
Bulb	PAR56 [PAR 7inch/180mm]
Operating Position	any [Any or Universal (U)]
Main Application	-
Gas Filling	GAS
Nominal Lifetime	2000 hr
Rated Lifetime	2000 hr
(hours)	
Rated Lifetime	2 an
(years)	

• Light Technical Characteristics

Beam Description	Wide Flood
Beam Angle	40 D
Beam Angle Technical	40 D
Luminous Intensity	9000 (max) cd
Color Rendering Index	100 Ra8
Color Temperature	2700 K
Rated Luminous Flux	2380 Lm
Rated Beam Angle	40 D
Luminous flux in 90° cone	2380 Lm

• Electrical Characteristics

Rated Wattage	300.0 W
Lamp Wattage	300 W
Voltage	230 V
Dimmable	Yes
Starting Time	0.0 s
Warm-up Time to 60% Light Outp	instant full light

• Environmental Characteristics

Energy Efficiency Label (EEL)	D
Energy consumption kWh/1000h	300 kWh

• Measuring Conditions

Switching cycle	8000X
-----------------	-------

• Product Dimensions

Overall Length C	126.9 (max) mm
Overall Length Rim C1	98 mm
Diameter D	178.5 (max) mm

• Product Data



Order code	923804244221
Full product code	923804244221
Full product name	PAR56 300W GX16d 230V WFL 1CT
Order product name	PAR56 300W GX16d 230V WFL 1CT/6
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6
Bar code on pack - EAN1	8711500159656
Bar code on outerbox - EAN3	8711500159663
Logistic code(s) - 12NC	923804244221
ILCOS code	IPAR-300-230-GX16d-179/40

PHILIPS

PAR56

Net weight per piece 513.000 gr

Dimensional drawing

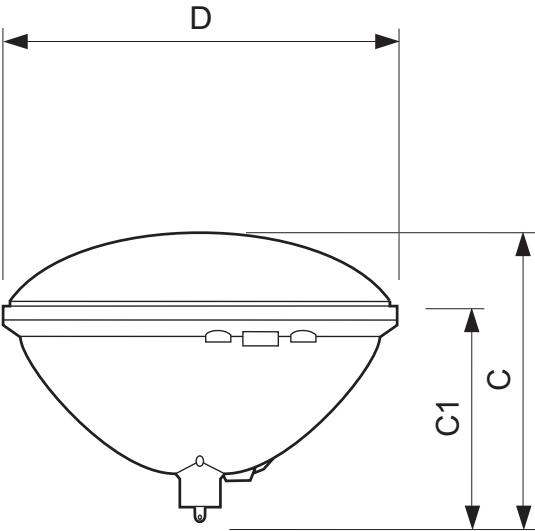

GX16d

PAR56 300W GX16d 230V WFL 1CT

Product	C (Max)	C1 (Norm)	D (Norm)	D (Max)
PAR56 300W GX16d 230V WFL	126.9	98	-	178.5



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 3
data subject to change