

Standard Ballasts 18–58 W, 230 V

For compact fluorescent lamps
Shape: 28×41 mm

Vacuum-impregnated with polyester resin


Push-in terminal for leads: 0.5–1 mm²

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

tw 130

Protection class I

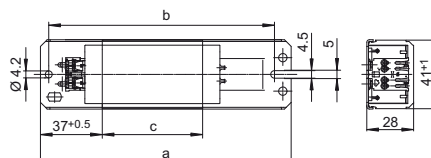

Lamp				Ballast									Capacitor	
Output	Type	Base	Current	Type	Ref. No.	V, Hz	a	b	c	Weight	Δt/Δtan.	EEI*	C _p	Current
W			mA				mm	mm	mm	kg	K		μF	mA
230 V, 50 Hz														
18	TC-D/TC-T	G24d-2/GX24d-2	220	LN 181.940	508922	230, 50	85	75	34	0.32	50/120	B1	2.0	110
				LN 181.319	163763	230, 50	85	75	34	0.32	60/140	B1	2.0	110
				LN 181.850	503871	230, 50	85	75	27	0.28	65/165	B2	2.0	110
18	TC-F/TC-L	2G10/2G11	370	LN 18.510	164572	230, 50	155	140	92	0.80	40/65	B1	4.5	120
				LN 18.131	530941	230, 50	150	140	60	0.55	55/95	B2	4.5	120
				L 18.934**	534621	230, 50	150	140	45	0.43	70/150	—	4.5	120
18	T-U	2G13	370	LN 18.131	530941	230, 50	150	140	60	0.55	55/95	B2	4.5	120
				L 18.934**	534621	230, 50	150	140	45	0.43	70/150	—	4.5	190
2x18	TC-F/TC-L	2G10/2G11	400	LN 2x18.135	532155	230, 50	150	140	45	0.43	65	B1	4.0	210
				L 36.334	530007	230, 50	150	140	60	0.55	60/155	B1	4.0	210
21	TC-DD	GR10q	260	LN 21.803	169651	230, 50	155	140	53	0.50	45/95	B1	3.0	120
22	T-R	G10q	400	LN 30.330	169503	230, 50	150	140	67	0.60	55/125	B2	4.5	200
24	TC-F/TC-L	2G10/2G11	345	LN 24/26.829	179659	230, 50	105	95	53	0.50	60/120	B2	4.5	150
				LN 24/26.804	534490	230, 50	150	140	60	0.55	55/110	B2	4.5	150
				L 18.934**	534621	230, 50	150	140	45	0.43	70/150	—	4.5	150
26	TC-D/TC-T	G24d-3/GX24d-3	325	LN 18.131	530941	230, 50	150	140	60	0.55	55/95	B1	3.5	140
				LN 26.813	509502	230, 50	110	100	45	0.45	55/145	B2	3.5	140
28	TC-DD	GR8/GR10q	320	LN 18.131	530941	230, 50	150	140	60	0.55	55/95	B1	3.5	150
				LN 18.510	164572	230, 50	155	140	92	0.80	40/65	B1	3.5	150
				L 18.934**	534621	230, 50	150	140	45	0.43	70/150	—	3.5	150
32	T-R	G10q	450	LN 36.824	172436	230, 50	150	140	72	0.64	55/125	B2	4.0	220
36	TC-F/TC-L	2G10/2G11	430	LN 36.570	169779	230, 50	155	140	92	0.80	35/90	B1	4.5	210
				LN 36.511	164590	230, 50	155	140	92	0.80	35/95	B1	4.5	210
				LN 36.149	529029	230, 50	150	140	60	0.55	55/150	B2	4.5	210
				L 36.337**	508294	230, 50	150	140	53	0.50	60/160	—	4.5	210

* Energy efficiency: EEI=B2 and EEI=B1, valid until 2017

** Ballasts without CE mark for markets outside of the EU