


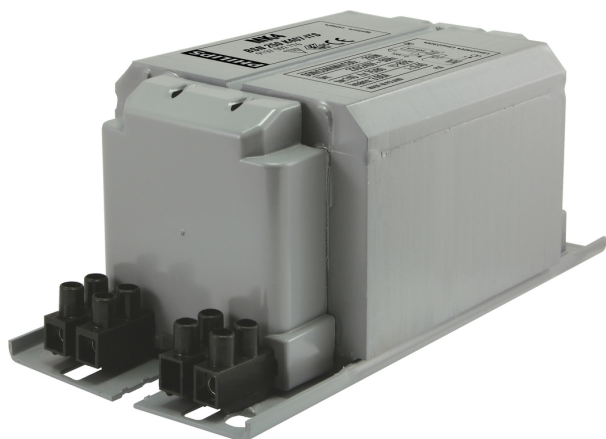

HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

BSN 250 K302-I 230V 50Hz BC2-151

Impregnated electromagnetic copper ballasts for use with an external semi-parallel ignitor for CDM, CDO, MH, HPI (Plus) and SON lamps

Catalog de date

• caracteristici generale

Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	250
Application code	K302-I
Line Voltage	230 V
Line Frequency	50 Hz
Design	BC2-151

• caracteristici de operare

Input current with PF-correct.	0.85 A
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
PowerFactor 100% output power	0.4 -

• caracteristici cablaj

Connector type	Screw
Wcs Ballast contacts	2.5 mm2

• caracteristici de temperatura

Active temperature protection	Yes
T-storage	-30 (min), 130 (max) C
T-winding maximum (tw)	140 (max) C
Delta-T normal conditions	85 C

• dimensiuni produs

Length A1	157.0 mm
Fixing Hole Distance	129.0 mm
Length A2	
Width B1	76.0 mm
Height C1	65.0 mm
Fixing Hole Diameter D1	6.2 mm

• Caract. aprobare & aplicare

CE marking	Yes
ENEC certificate	Yes


• Informatii produs

Cod comanda	940800 00
Cod produs	872790094080000
Denumire produs	BSN 250 K302-I 230V 50Hz BC2-151
Produs - Denumire comanda	BSN 250 K302-I 230V 50Hz BC2-151
Bucati per pachet	1
Configuratie Impachetare	6
Pachete per box	6
Cod de bare per produs (EAN1)	8727900940800
Cod de bare per box (EAN3)	8727900940817
Cod logistic - 12NC	913700283126
Masa neta per bucata	2.980 kg

PHILIPS
sense and simplicity

HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

Cote

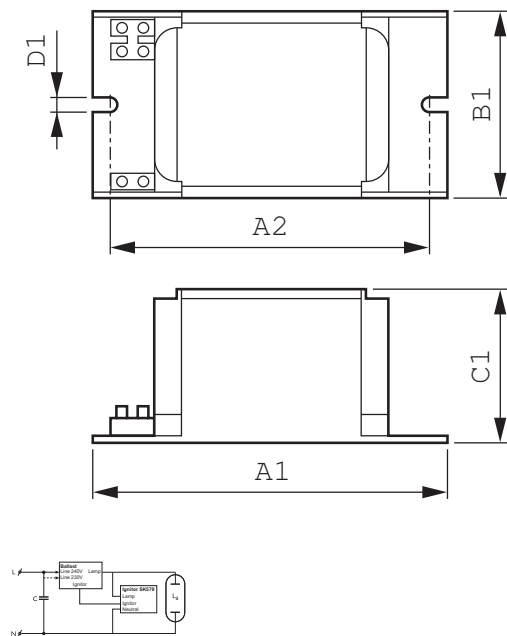

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
BSN 250 K302-I 230V 50Hz BC2-151	157.0	129.0	76.0	65.0	6.2



© 2011 Koninklijke Philips Electronics N.V.
Toate drepturile rezervate.

Specificațiile pot fi schimbate fără notificare. Informațiile constituie proprietatea Koninklijke Philips Electronics N.V.

www.philips.com/lighting

2011, Decembrie 21
Informație ce poate fi modificată