



EN 60598-1	230V / 50Hz	IP 21	IP 41	IK 08		960°C		RoHS	250W / 400W
------------	-------------	-------	-------	-------	--	-------	--	------	-------------



Sticlă securizată /
safety glass
grătar / grid



Grătar protecție/protective grid
Cod / Code: 01107874

Domeniul de utilizare:
Iluminatul de interior pentru încăperi sau
spații protejate de înălțime medie (până
la 6-8m): hale industriale, săli de sport,
spații comerciale, etc.

Descriere:

Corp: Armătură din tablă de oțel vopsită
cu pulbere

Reflector: Din tablă de aluminiu oglindată

Dispensor: Cu sticlă de protecție,
termorezistentă, securizată (S)

La cerere se livrează și cu grătar de
protecție

Montaj: Încastrat (I) în tavan fals

Sursa: Sodiu (HST) și halogenuri metalice
(HIT) de 250W și 400W

Dulie: E40

Standard: SR EN 60598-1

Application:
Indoor lighting for medium height spaces
(up to 6-8m height): industrial areas,
gyms, commercial areas, etc.

Description:

Body: Powder painted steel sheet

Reflector: Mirrored aluminum sheet

Protective glass: Thermoresistant,
tempered (S)

On request may be fitted with protective
grid


Mounting: Recessed mounting (I) in false
ceilings

Source: Sodium (HST) and metallic
halides (HIT) 250W, 400W


Socket: E40

Standard: SR EN 60598-1

montaj încastrat / recessed mounting

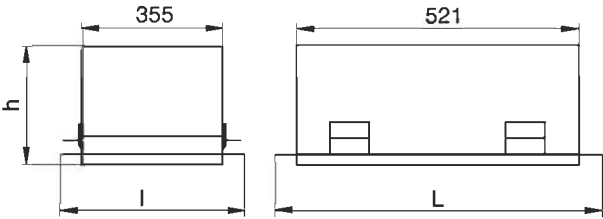

montaj varianta încastrată/
recessed mounting



Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]			Masa/ Weight [kg]	Lampa/ Lamp
			L	l	h		
250W halogenură metalică/metal halide	31361030	min. 0.92	595	429	165	12.5	HIT
250W sodiu/sodium	39361030	min. 0.92	595	429	165	12.5	HST
400W halogenură metalică/metal halide	31371030	min. 0.92	595	429	165	12.5	HIT
400W sodiu/sodium	39371030	min. 0.92	595	429	165	12.5	HST

