



EN 60598-1	230V / 50Hz	IP 55	IP 65	IR2		CE	RoHS
------------	-------------	-------	-------	-----	--	----	------

Domeniul de utilizare: Dirijarea traficului rutier în intersecții

Descriere:

Corp: ABS / PC pe care se montează în exterior cele 2 racorduri de fixare din PC

Ușa: ABS / PC prevăzută cu parasolar, se fixează pe corp prin intermediul unui sistem de înclichetare

Opțional: Sistem de siguranță la deschidere

Modulul cu LED este prevăzut cu dispersor roșu, verde sau galben fixat pe ușa semaforului

Montaj: Pe stâlp cu ajutorul racordurilor prevăzute cu găuri pentru șuruburi M8 și canal pentru colier lat de max.10 mm

Diametrul suprafeței luminoase: 300 mm pentru fiecare compartiment

Conectarea la rețeaua electrică se realizează prin racordul superior

Sursa: LED

Standard: SR EN 60598-1, SR EN- 12368

Application: Traffic control

Description:

Body: ABS / PC with 2 PC brackets

Door: ABS / PC fitted with a sun shade, fixed on the body with a click system

Optional: Safety opening system

The LED module is fitted with red, green or yellow diffuser fixed on the door


Mounting: On pole by means of the joint-brackets with holes for M8 screws and collar channel width max.10 mm

Diffuser diameter: 300mm for each lamp

The superior joint-brackets ensures the electrical network connection

Source: LED

Standard: SR EN 60598-1, SR EN- 12368

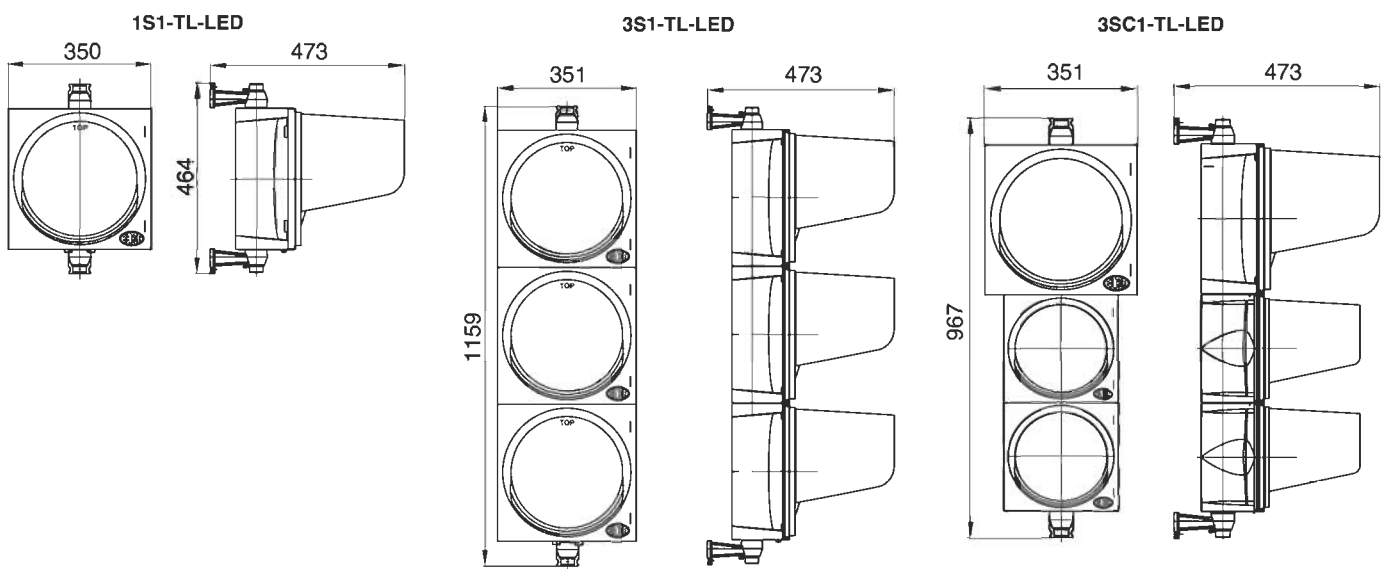

Tip/Type	Cod produs/ Product code	Putere/ Power [W]	Corp-ușă-cozoroc/ body-door-cap	Mască/ Masc	Culoare/ colour	Masa/ Weight [kg]	Lampa/ Lamp
1S1-TL	75412016	10-18	ABS	fără/without		3.10	LED
1S1-TL	75412019	10-18	PC	fără/without		3.10	
1S1-TL	75412017	10-18	ABS	fără/without		3.10	
1S1-TL	75412030	10-18	PC	fără/without		3.10	
1S1-TL	75412018	10-18	ABS	fără/without		3.10	
1S1-TL	75412091	10-18	PC	fără/without		3.10	
3S1-TL	75412104	3 x (10-18)	ABS	fără/without		9.30	
3S1-TL	75412105	3 x (10-18)	PC	fără/without		9.30	
3SC1-TL	75412002	(10-18)+11+7	ABS	fără/without		6.90	
3SC1-TL	75412003	(10-18)+11+7	PC	fără/without		6.90	

