

EN 60598-1	230V / 50Hz	IP 66	IK 10			RoHS	100W / 150W / 250W
------------	-------------	-------	-------	--	--	------	--------------------



Domeniul de utilizare: Iluminatul rezidențial stradal

Descriere:

Corp: Poliamidă armată cu fibră de sticlă

Reflector: Din tablă de aluminiu lustruit chimic

Dispersor: Transparent din PC

La cerere dispersorul poate fi din sticlă clară.

Montaj: În consolă pe țevă cu diametre între 46 și 60mm; în capătul stâlpului de susținere pe țevă verticală cu diametrul maxim de 60mm

Sursa: Sodiu (HST), mercur (HME)

Dulie: E40

Standard: SR EN 60598-1

Application: Street and residential lighting

Description:

Body: Glass fiber reinforced polyamide

Reflector: Mirrored aluminum sheet chemically polished

Diffuser: Clear PC


On request may be fitted with clear glass diffuser

Mounting: On tubular console 46 - 60mm diameter; on top of pole (tubular) max. 60mm diameter

Source: Sodium (HST), mercury (HME)

Socket: E40

Standard: SR EN 60598-1

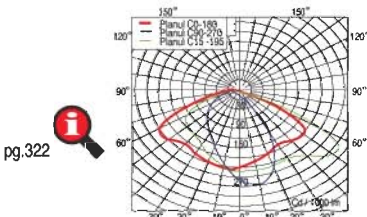

Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]			Masa/ Weight [kg]	Lampa/ Lamp			
			L	I	h					
DELFIN 03 100W	34431001	min. 0.92	817	311	287	6.30	HST 			
DELFIN 03 100W AP	34431002	min. 0.92	817	311	287					
DELFIN 03 100W AP CLS II	34431003	min. 0.92	817	311	287					
DELFIN 03 100W AP SF	34431004	min. 0.92	817	311	287					
DELFIN 03 100W AP CLS II SF	34431005	min. 0.92	817	311	287					
DELFIN 03 100W AP SF RF	34431006	min. 0.92	817	311	287					
DELFIN 03 100W AP CLS II SF RF	34431007	min. 0.92	817	311	287					
DELFIN 03 100W AP sticlă/glass SF RF	34431008	min. 0.92	817	311	240					
DELFIN 03 100W AP CLS II sticlă/glass SF RF	34431009	min. 0.92	817	311	240					
DELFIN 03 150W	34441042	min. 0.92	817	311	287	7.00		HST 		
DELFIN 03 150W AP	34441043	min. 0.92	817	311	287					
DELFIN 03 150W AP CLS II	34441044	min. 0.92	817	311	287					
DELFIN 03 150W AP sticlă/glass	34441045	min. 0.92	817	311	240					
DELFIN 03 150W AP CLS II sticlă/glass	34441046	min. 0.92	817	311	240					
DELFIN 03 150W AP SF	34441047	min. 0.92	817	311	287					
DELFIN 03 150W AP CLS II SF	34441048	min. 0.92	817	311	287					
DELFIN 03 150W AP sticlă/glass SF	34441049	min. 0.92	817	311	240					
DELFIN 03 150W AP CLS II sticlă/glass SF	34441050	min. 0.92	817	311	240					
DELFIN 03 150W AP SF RF	34441051	min. 0.92	817	311	287					
DELFIN 03 150W AP CLS II SF RF	34441052	min. 0.92	817	311	287					
DELFIN 03 150W AP sticlă/glass SF RF	34441053	min. 0.92	817	311	240					
DELFIN 03 150W AP CLS II sticlă/glass SF RF	34441054	min. 0.92	817	311	240					
DELFIN 03 150W AP Pietonal/pedestrian	34441055	min. 0.92	817	311	287					
DELFIN 03 150W AP Pietonal/pedestrian SF	34441056	min. 0.92	817	311	287					
DELFIN 03 250W	34461001	min. 0.92	817	311	287	8.20			HST 	
DELFIN 03 250W AP	34461002	min. 0.92	817	311	287					
DELFIN 03 250W AP CLS II	34461003	min. 0.92	817	311	287					
DELFIN 03 250W AP sticlă/glass	34461004	min. 0.92	817	311	240					
DELFIN 03 250W AP CLS II sticlă/glass	34461005	min. 0.92	817	311	240					
DELFIN 03 250W AP SF	34461006	min. 0.92	817	311	287					
DELFIN 03 250W AP CLS II SF	34461007	min. 0.92	817	311	287					
DELFIN 03 250W AP sticlă/glass SF	34461008	min. 0.92	817	311	240					
DELFIN 03 250W AP CLS II sticlă/glass SF	34461009	min. 0.92	817	311	240					
DELFIN 03 250W AP SF RF	34461010	min. 0.92	817	311	287					
DELFIN 03 250W AP CLS II SF RF	34461011	min. 0.92	817	311	287					
DELFIN 03 250W AP sticlă/glass SF RF	34461012	min. 0.92	817	311	240					
DELFIN 03 250W AP CLS II sticlă/glass SF RF	34461013	min. 0.92	817	311	240					
DELFIN 03 125W DP RA	34461014	min. 0.92	817	311	287		6.60			HME 
DELFIN 03 125W DP RA AP CLS I	34461015	min. 0.92	817	311	287					

AP = PLACA APARATAJ / GEAR PLATE; CLS II = CLASA II DE IZOLAȚIE / INSULATION CLASS; STICLĂ = DISPERSOR DIN STICLĂ / GLASS DIFFUSER; RF = REGLAJ DE FLUX LUMINOS / DIMMING; SF = SIGURANȚĂ FUZIBILĂ / FUSE