



MSR Gold™ MiniFastFit (Touring/Stage)

MSR Gold™ 700/2 MiniFastFit 1CT

Thanks to the specially designed lamp base, the MSR Gold™ MiniFastFit takes just seconds to replace, to help ensure non-stop clubbing entertainment. In addition, the innovative gold plated pins ensure excellent current transfer to prolong lamp and lamp holder lifetimes and thereby reduce lamp replacement costs. Easy handling and small compact fixture designs are allowed by the lamps compact size, while the very short arc provides a high perceived brightness and high beam intensity. Moreover, the latest addition to the range: Philips MSR Gold™ 700/1 FastFit offers a pure, white light (5600K). Especially designed for theater applications.

Product data

• General Characteristics

| | |
|----------------------|---------------|
| System Description | MiniFastFit |
| Cap-Base | PGJX28 |
| Cap-Base Information | PGJX28 |
| Execution | - |
| Operating Position | any |
| Main Application | Entertainment |
| Life to 50% failures | 750 hr |
| EM | |

• Light Technical Characteristics

| | |
|-----------------------------|-----------------------------|
| Color Code | 2 |
| Color Rendering Index | 75 Ra8 |
| Color Temperature | 7200 K |
| Color Temperature Technical | 7200 K |
| Chromaticity Coordinate X | 300 - |
| Chromaticity Coordinate Y | 324 - |
| Luminous Flux Lamp EM | 44000 (min), 47000 (nom) Lm |
| Luminous Efficacy Lamp EM | 69 Lm/W |

• Electrical Characteristics

| | |
|-------------------------|-------------|
| Lamp Wattage | 700 W |
| Lamp Wattage Technical | 700 W |
| Lamp Current | 10.2 A |
| Ignition Supply Voltage | 198 (min) V |

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

• Luminaire Design Requirements

| | |
|-------------------|-------------|
| Pinch Temperature | 500 (max) C |
| Bulb Temperature | 950 (max) C |

• Product Dimensions

| | |
|-----------------------|-------------------------------------|
| Overall Length C | 112 (max) mm |
| Diameter D | 23.2 (max) mm |
| Width F | 35.3 (min), 36 (nom), 36.5 (max) mm |
| Light Center Length L | 55 (min), 56 (nom), 57 (max) mm |
| Arc Length O | 3.8 mm |


• Product Data

| | |
|-----------------------------|----------------------------------|
| Order code | 928199905115 |
| Full product code | 928199905115 |
| Full product name | MSR Gold™ 700/2 MiniFastFit 1CT |
| Order product name | MSR Gold 700/2 MiniFastFit 1CT/4 |
| Pieces per pack | 1 |
| Packing configuration | 4 |
| Packs per outerbox | 4 |
| Bar code on pack - EAN1 | 8718291221173 |
| Bar code on outerbox - EAN3 | 8718291221180 |
| Logistic code(s) - 12NC | 928199905115 |
| Net weight per piece | 0.052 kg |

PHILIPS


MSR Gold™ MiniFastFit (Touring/Stage)

Dimensional drawing

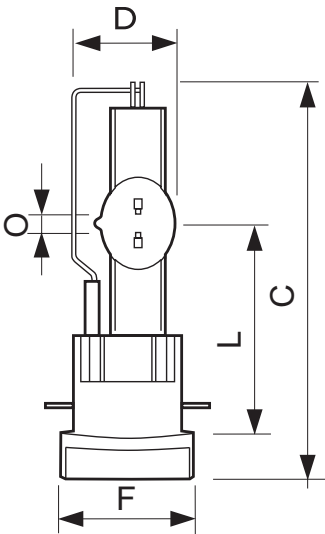

MSR Gold™ 700/2 MiniFastFit 1CT

| Product | A (Min) | A (Norm) | A (Max) | C (Max) | D (Max) | D1 (Norm) | F (Min) | F (Norm) | F (Max) | L (Min) | L (Norm) | L (Max) | O (Norm) |
|----------------------------|---------|----------|---------|---------|---------|-----------|---------|----------|---------|---------|----------|---------|----------|
| MSR GOLD 700/2 MiniFastFit | - | - | - | 112 | 23.2 | - | 35.3 | 36 | 36.5 | 55 | 56 | 57 | 3.8 |



Photometric data

