



# MASTER PL-L Xtra 4 Pin

## MASTER PL-L Xtra 55W/840/4P 1CT

MASTER PL-L Xtra is a medium to high-wattage linear compact fluorescent lamp, typically used for general-illumination ceiling luminaires in retail, hospitality and office applications demanding higher lighting levels. MASTER PL-L Xtra lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-L lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as HF electronic gear and is provided with a plug-in/pull-out lamp base.

### Product data

#### • General Characteristics

System Description	High Frequency [High Frequency]
Cap-Base	2G11
Cap-Base Information	4P
Life to 10% fail	25000 hr
Preheat EL,3h	
Life to 10% fail	7000 hr
Nonpreh EL,3h	
Life to 50% fail	36000 hr
Preheat EL,3h	
Life to 50% fail	11000 hr
Nonpreh EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	98 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	94 %
20000h Rated,3h	

Luminous Flux EL	4800 Lm
25°C, Nominal	
Lum Flux Rated HF	4800 Lm
25°C,horiz	
Lum Flux Nominal	4800 Lm
HF 25°C,horiz	
Lum Efficacy Rated	87 Lm/W
HF 25°C,hor	
LLMF HF 2000h	95 %
Rated	
LLMF HF 4000h	94 %
Rated	
LLMF HF 6000h	93 %
Rated	
LLMF HF 8000h	92 %
Rated	
LLMF HF 12000h	91 %
Rated	
LLMF HF 16000h	90 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	30 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

#### • Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EL	4800 Lm
25°C, Rated	

#### • Electrical Characteristics

Lamp Wattage	55 W
Lamp Wattage EL	55.0 W
25°C, Rated	
Lamp Wattage EL	55 W
25°C, Nominal	
Lamp Voltage EL	105 V
25°C	

## MASTER PL-L Xtra 4 Pin

Lamp Current EL 25°C	0.525 A
Dimmable	Yes

Insertion Length B	535 (max) mm
Overall Length C	541.6 (max) mm
Diameter D	39.0 (max) mm
Diameter D1	18.0 (max) mm

### • Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	3.0 mg
Energy consumption kWh/1000h	61 kWh

### • Measuring Conditions

Calibration Current	0.550 A
HF Generator Rated Voltage	202 V
Resistor	185 ohm

### • Product Dimensions

Base Face to Base Face A	509.2 (max) mm
-----------------------------	----------------

### • Product Data



Order code	927908884014
Full product code	927908884014
Full product name	MASTER PL-L Xtra 55W/840/4P 1CT
Order product name	MASTER PL-L Xtra 55W/840/4P 1CT/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500897640
Bar code on outerbox - EAN3	8711500897657
Logistic code(s) - 12NC	927908884014
ILCOS code	FSDH-55/40/1B-L/P-2G11
Net weight per piece	134.000 gr

## Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear

- Shorter lamp life when often switching and not well pre-heated electrodes

## Dimensional drawing

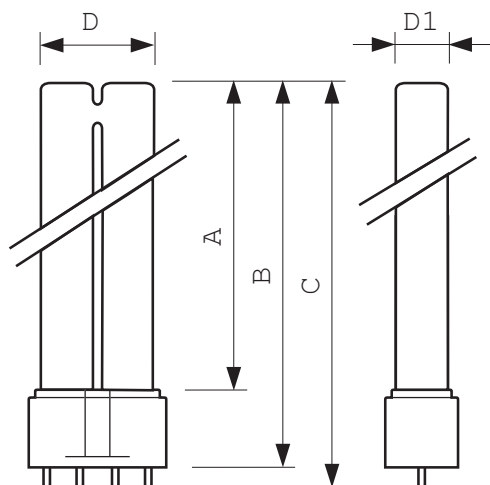


2G11

### MASTER PL-L Xtra 55W/840/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-L Xtra 55W/840/4P	509.2	535	541.6	39.0	18.0

## Photometric data

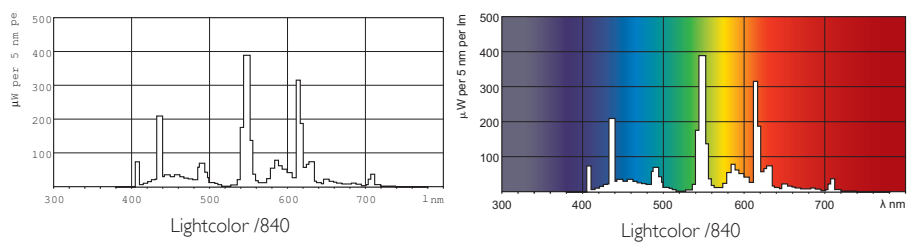

© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, April 2  
data subject to change