



MASTER TL5 High Output Xtra

MASTER TL5 HO Xtra 49W/840 1SL

This TL5 lamp (tube diameter 16 mm) combines the advantages of a TL5 High Output lamp (TL5 HO lamps are optimized for installations requiring high light output and offer excellent lumen maintenance and color rendering) with a long and reliable lifetime. This results in extra-low maintenance costs and saves on expensive spot replacement. Main applications are places where lamp replacement costs and/or costs of disruption are high.

Product data

• General Characteristics

System Description	High Output
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	30000 hr
Preheat EL,3h	
Life to 50% fail	45000 hr
Preheat EL,3h	
LSF HF Preheat	100 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	98 %
16000h Rated,3h	
LSF HF Preheat	97 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EL	4375 Lm
25°C, Rated	
Luminous Flux EL	4375 Lm
25°C, Nominal	

Luminous Flux Lamp	4900 Lm
EL 35°C	
Lum Efficacy Rated	89 Lm/W
HF 25°C	
Lum Efficacy Rated	98 Lm/W
HF 35°C	
Luminance Average	2.0 cd/cm2
EL 25°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Lamp Wattage	49 W
Lamp Wattage EL	49.2 W
25°C, Rated	
Lamp Wattage EL	49.0 W
25°C, Nominal	
Lamp Wattage EL	49.3 W
35°C	

MASTER TL5 High Output Xtra

Lamp Voltage EL 25°C	195 V
Lamp Voltage EL 35°C	191 V
Lamp Current EL 25°C	0.255 A
Lamp Current EL 35°C	0.260 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	3.0 mg
Energy consumption kWh/1000h	54 kWh

• Measuring Conditions

Calibration Current	0.255 A
HF Generator Rated Voltage	390 V
Resistor	765 ohm

• Product Dimensions

Base Face to Base Face A	1449.0 (max) mm
Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

• Product Data



Order code	927927784026
Full product code	927927784026
Full product name	MASTER TL5 HO Xtra 49W/840 1SL
Order product name	MASTER TL5 HO Xtra 49W/840 1SL
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8711500262530
Bar code on outerbox - EAN3	8711500262608
Logistic code(s) - 12NC	927927784026
ILCOS code	FDH-49/40/1B-L/P-G5-16/1450
Net weight per piece	128.700 gr

Warnings and Safety

- Philips HF Xtreme gear ensures longest lifetime.

- To achieve lifetimes as published for 100% operation, dimming below 30% should not be applied.

Dimensional drawing


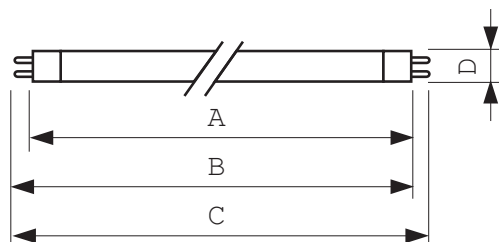


G5

MASTER TL5 HO Xtra 49W/840 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO Xtra 49W/840	1449.0	1453.7	1456.1	1463.2	17

Photometric data

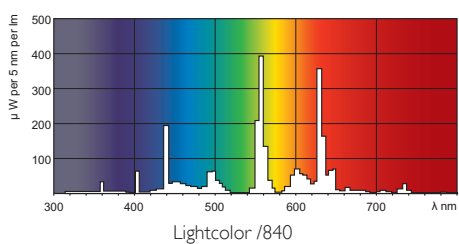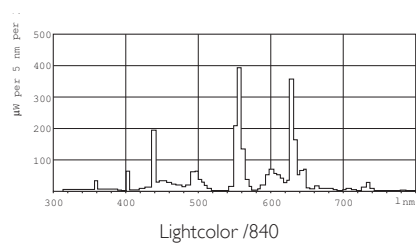

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, March 31
data subject to change