



MASTERC colour CDM-TC Elite

MASTERC colour CDM-TC Elite 70W/930 G8.5 1CT

Compact, single-ended, very high-efficiency, long-life ceramic metal-halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Characteristics

Cap-Base	G8.5
Bulb	T14 [T 14 mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	9000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EL	12000 hr
Life to 50% failures EL	15000 hr

• Light Technical Characteristics

Color Code	930 [CCT of 3000K]
Color Rendering Index	87 (min), 90 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Color Temperature Technical	2970 K
Luminous Flux Lamp EL	7700 Lm
Luminous Efficacy Lamp EL	105 Lm/W
Lumen Maintenance EL 2000h	95 %
Lumen Maintenance EL 5000h	88 %
Lumen Maintenance EL 10000h	83 %
Lumen Maintenance EL 12000h	82 %
Design Mean Lumens EL	6650 Lm

Chromaticity Coordinate X	0.435 -
Chromaticity Coordinate Y	0.396 -

• Electrical Characteristics

System Power EL	83 W
Lamp Wattage	70 W
Lamp Wattage EL 25°C, Rated	73.0 W
Lamp Wattage EL 25°C, Nominal	70.0 W
Lamp Voltage	85 V
Lamp Current EL	0.86 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	6.6 mg
Energy consumption kWh/1000h	80 kWh

• UV-related Characteristics

Damage Factor D/fc PET (NIOHS)	0.2 (nom), 0.3 (max) - 8 (min), 64 (nom) h500lx
--------------------------------	---



asimpleswitch.com

PHILIPS

MASTERColour CDM-TC Elite

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	550 (max) C

• Product Dimensions

Overall Length C	85 (max) mm
Diameter D	15 (max) mm
Light Center Length L	51 (min), 52 (nom), 53 (max) mm
Arc Length O	7.15 mm
Light Center Length L [inch]	2 (min), 2.45 (nom), 2.9 (max) in
Overall Length C [inch]	3.3 (max) in
Diameter D [inch]	0.6 (max) in

• Product Data

Order code	928189505131
------------	--------------


Full product code	928189505131
Full product name	MASTERColour CDM-TC Elite 70W/930 G8.5 1CT
Order product name	MASTERC CDM-TC Elite 70W/930 G8.5 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900911534
Bar code on outerbox - EAN3	8727900911541
Logistic code(s) - 12NC	928189505131
ILCOS code	MT/UB-70/930-H-G8.5-17/85
Net weight per piece	0.010 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)


Dimensional drawing

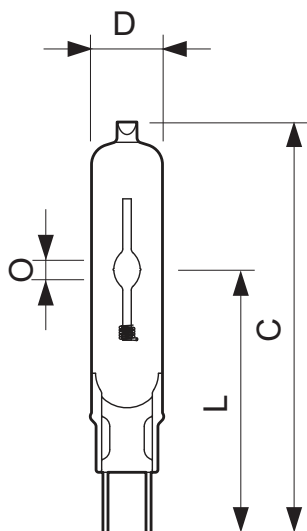

MASTERColour CDM-TC Elite 70W/930 G8.5 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-TC ACCENT 70W/930 G8.5	85	15	51	52	53	7.15

Dimensional drawing



G8.5

Photometric data

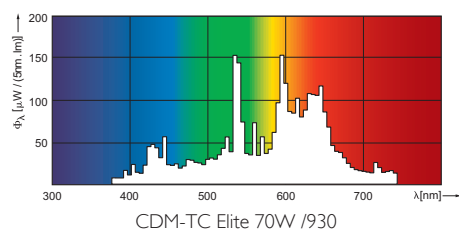

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 18
data subject to change