



MASTER TL-D Xtreme

MASTER TL-D Xtreme 58W/840 1SL

This MASTER TL-D Xtreme lamp offers extremely long lifetime. This results in extra-low lamp cost over life. It is therefore suitable for places where lamp replacement is expensive, due to high ceilings or disturbance of operations, and applications with long burning cycles, e.g. tunnels, oil rigs, manufacturing lines. It can be operated on existing gear or dedicated HF Xtreme gear.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Cap-Base Information	Green Plate
Bulb	T8 [26 mm]
Life to 10% failures EM,3 h	40000 hr
Life to 10% fail Preheat EL,3h	66000 hr
Life to 10% fail Nonpreh EL,3h	33000 hr
Life to 50% failures EM	47000 hr
Life to 50% failures EM,3 h	47000 hr
Life to 50% fail Preheat EL,3h	79000 hr
Life to 50% fail Nonpreh EL,3h	39000 hr
LSF EM 2000h Rated, 3h cycle	100 %
LSF EM 4000h Rated, 3h cycle	99 %
LSF EM 6000h Rated, 3h cycle	99 %
LSF EM 8000h Rated, 3h cycle	99 %
LSF EM 12000h Rated,3h cycle	99 %
LSF EM 16000h Rated,3h cycle	99 %
LSF EM 20000h Rated,3h cycle	99 %

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
------------	--------------------

Color Rendering Index	85 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EM 25°C, Rated	5150 Lm
Luminous Flux EM 25°C, Nominal	5150 Lm
Lum Efficacy Rated EM 25°C	88 Lm/W
LLMF EM 2000h Rated	96 %
LLMF EM 4000h Rated	95 %
LLMF EM 6000h Rated	94 %
LLMF EM 8000h Rated	93 %
LLMF EM 12000h Rated	92 %
LLMF EM 16000h Rated	91 %
LLMF EM 20000h Rated	90 %
Design Temperature	25 C
Chromaticity Coordinate X	381 -
Chromaticity Coordinate Y	381 -

• Electrical Characteristics

Lamp Wattage	58 W
Lamp Wattage EM 25°C, Nominal	58 W

MASTER TL-D Xtreme

Lamp Wattage EM 25°C, Rated	58.5 W
Lamp Voltage EM 25°C	108 V
Lamp Current EM 25°C	0.665 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	3.0 mg
Energy consumption kWh/1000h	68 kWh

• Product Dimensions

Base Face to Base Face A	1500.0 (max) mm
Insertion Length B	1504.7 (min), 1507.1 (max) mm

Overall Length C	1514.2 (max) mm
Diameter D	28 (max) mm

• Product Data

Order code	927983384014
Full product code	927983384014
Full product name	MASTER TL-D Xtreme 58W/840 1SL
Order product name	MASTER TL-D Xtreme 58W/840 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500558862
Bar code on outerbox - EAN3	8711500558879
Logistic code(s) - 12NC	927983384014
ILCOS code	FD-58/40/1B-E-G13
Net weight per piece	172.600 gr

Warnings and Safety



- To achieve published lifetimes for 100% operation, do not dim below 30%

- When used on electromagnetic gear, it is strongly recommended to apply only Philips S10 or S10E starters (for 18W types S2 or S2E) to achieve the published lifetimes, and to install new starters when relamping.

Dimensional drawing



MASTER TL-D Xtreme 58W/840 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D Xtreme 58W/840	1500.0	1504.7	1507.1	1514.2	28

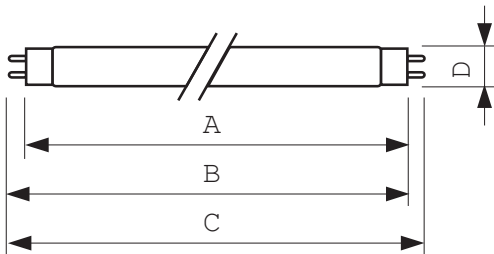

G13

Photometric data

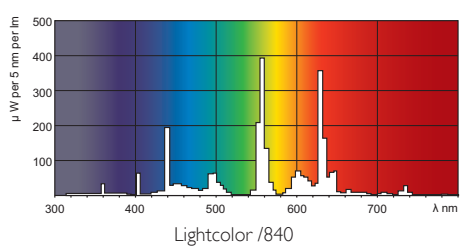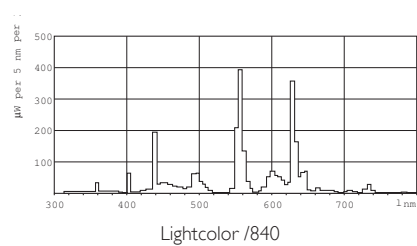

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 2
data subject to change