


# MSR Gold™ FastFit

## MSR Gold™ 1200 FastFit 1CT

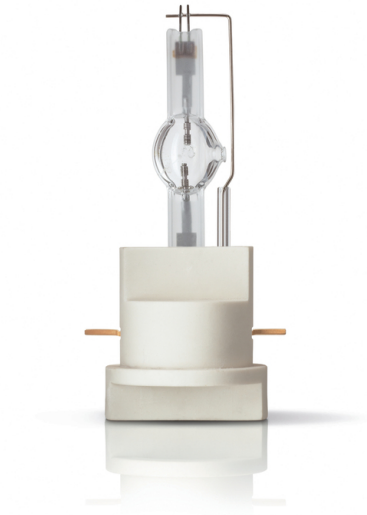

All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily.

### Product data

#### • General Characteristics

System Description	FastFit
Cap-Base	PGJX50
Cap-Base Information	PGJX50
Execution	-
Operating Position	any
Main Application	Entertainment
Life to 50% failures	750 hr
EM	

#### • Light Technical Characteristics

Color Code	-
Color Rendering Index	80 Ra8
Color Temperature	6000 K
Color Temperature Technical	6000 K
Chromaticity Coordinate X	318 -
Chromaticity Coordinate Y	327 -
Luminous Flux Lamp EM	79500 (min), 95000 (nom) Lm
Luminous Efficacy Lamp EM	80 Lm/W

#### • Electrical Characteristics

Lamp Wattage	1200 W
Lamp Wattage Technical	1200 W
Lamp Current	15 A
Ignition Supply Voltage	198 (min) V

Dimmable	Yes
----------	-----

#### • Luminaire Design Requirements

Pinch Temperature	500 (max) C
Bulb Temperature	950 (max) C

#### • Product Dimensions


Overall Length C	128 (max) mm
Diameter D	26.1 (max) mm
Width F	41 mm
Light Center Length L	64 (min), 65 (nom), 66 (max) mm
Arc Length O	5.5 mm

#### • Product Data

Order code	928175005115
Full product code	928175005115
Full product name	MSR Gold™ 1200 FastFit 1CT
Order product name	MSR Gold 1200 FastFit 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8718291221296
Bar code on outerbox - EAN3	8718291221302
Logistic code(s) - 12NC	928175005115
Net weight per piece	0.147 kg


# PHILIPS

Dimensional drawing

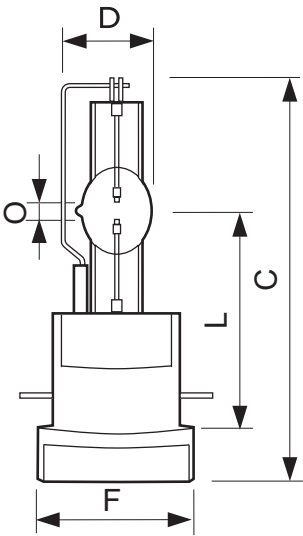

MSR Gold™ 1200 FastFit 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR GOLD 1200 FastFit	-	-	-	128	26.1	-	-	41	-	64	65	66	5.5



PGJX50

