

MSR

MSR 575/2 10H 1CT



The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Product data

• General Characteristics

System Description	Cold Strike
Cap-Base	GX9.5
Cap-Base Information	20mm
Execution	-
Operating Position	any
Main Application	Studio/Disco
Life to 50% failures	1000 hr
EM	

• Light Technical Characteristics

Color Code	2
Color Rendering Index	70 Ra8
Color Temperature	7200 K
Color Temperature Technical	6990 K
Chromaticity Coordinate X	302 -
Chromaticity Coordinate Y	320 -
Luminous Flux Lamp EM	39000 (min), 49000 (nom) Lm
Luminous Efficacy Lamp EM	85 Lm/W

• Electrical Characteristics

Lamp Wattage	575 W
Lamp Wattage Technical	575 W
Lamp Current	6.95 A
Ignition Supply Voltage	207 (min) V

Dimmable No

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	700 (max) C

• Product Dimensions


Overall Length C	125 (max) mm
Diameter D	30 (max) mm
Width F	34 (min), 35 (nom), 36 (max) mm
Light Center Length L	64 (min), 65 (nom), 66 (max) mm
Arc Length O	7.0 mm

• Product Data

Order code	928171605115
Full product code	928171605115
Full product name	MSR 575/2 10H 1CT
Order product name	MSR 575/2 10H 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8718291221272
Bar code on outerbox - EAN3	8718291221289
Logistic code(s) - 12NC	928171605115
Net weight per piece	0.057 kg


PHILIPS

Dimensional drawing


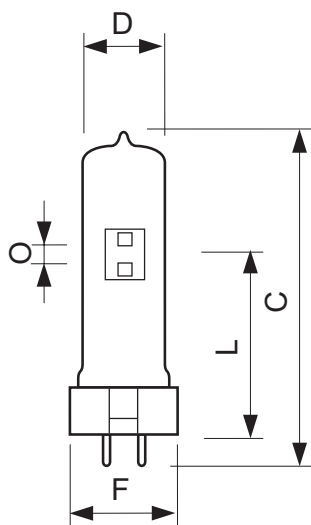


MSR 575/2 10H 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 575/2 10H	-	-	-	125	30	-	34	35	36	64	65	66	7.0



Photometric data

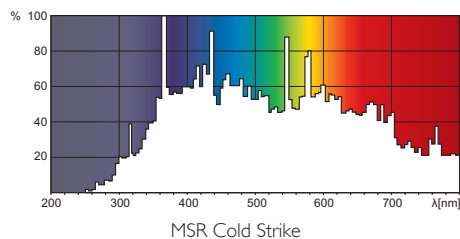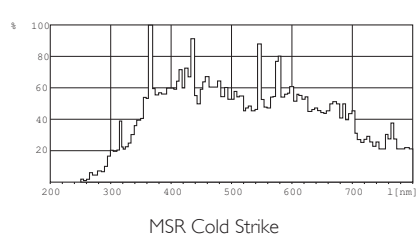

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 7
data subject to change